


SOLAR ELECTRIC



KOSTAL

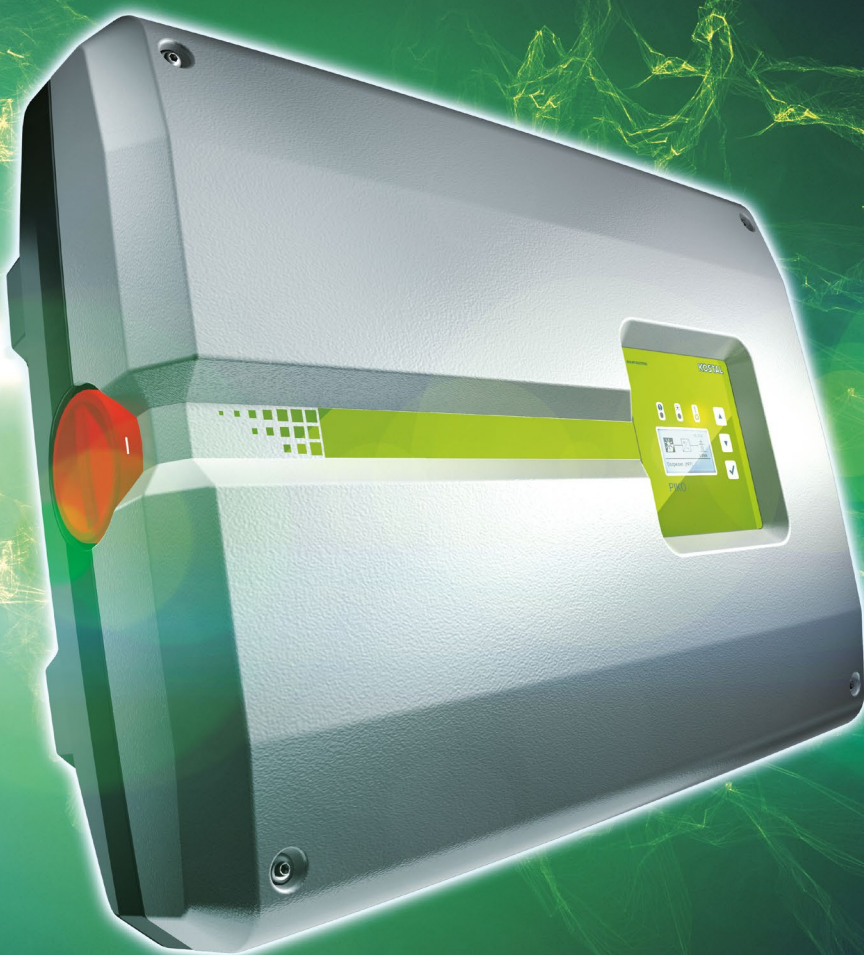

Smart  
connections.

Data sheet

PIKO 10-20

# PIKO inverter: flexible, communicational

## Flexible in use

- 3-phase feed-in
- Up to 3 MPP trackers suited to the layout of almost all roofs
- Wide input voltage range for flexible string design

## Smart performance


- Fast, self-learning shadow management – adapts individually to the installation site
- Dynamic active power control and energy consumption measurement via optional PIKO BA Sensor

## Smart connected

- Standard integrated communication package with data logger, system monitoring and Webserver
- Free Solar Portal and Solar App for monitoring the PV system
- Many interfaces without additional components: Display, network and control interfaces

## Easy to install

- Simple device configuration using commissioning wizard
- Integrated switch contact for self-consumption optimisation
- Integrated electronic DC switch
- Quick, uncomplicated and tool-free AC and DC installation

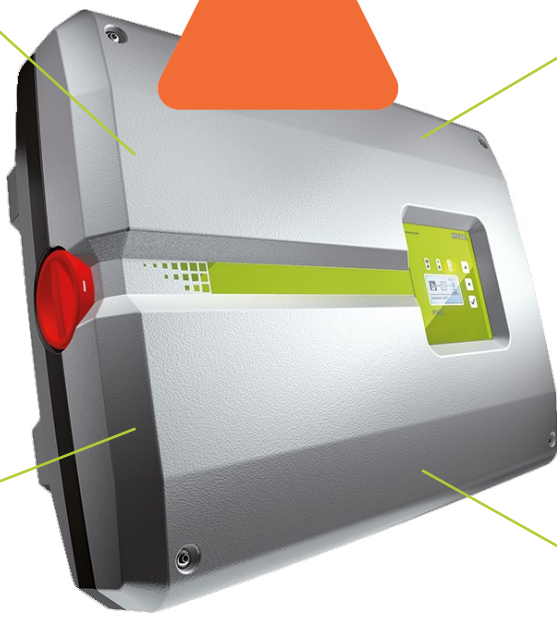

# PIKO 10-20: compact and rapidly deployable



A



B



C

PIKO 10-12: (A) 44.5 cm, (B) 58.0 cm, (C) 24.8 cm  
PIKO 17-20: (A) 54.0 cm, (B) 70.0 cm, (C) 26.5 cm

# Technical data PIKO 10-20



Power class		12	15	17	20		
Input side (DC)	Max. PV power <sup>1)</sup> (cos φ = 1)	kW	18	22.5	25.5	30	
	Nominal DC power		12.3	15.3	17.4	20.4	
	Rated input voltage (U <sub>DC,r</sub> )	V	680				
	Start-up input voltage (U <sub>DCstart</sub> )	V	180				
	Input voltage range (U <sub>DCmin</sub> - U <sub>DCmax</sub> )	V	160...1000				
	MPP range at rated output in single-tracker operation (U <sub>MPPmin</sub> - U <sub>MPPmax</sub> )	V	527...800	626...800	-	-	-
	MPP range at rated output in two-tracker operation (U <sub>MPPmin</sub> - U <sub>MPPmax</sub> )	V	sym: 290/290...800 unsym: 390/250...800	sym: 345/345...800 unsym: 490/250...800	390...800	440...800	515...800
	MPP range at rated output in three-tracker operation (U <sub>MPPmin</sub> - U <sub>MPPmax</sub> )	V	-	-	sym: 260/260/260...800 unsym: 325/325/250...800	sym: 290/290/290...800 unsym: 375/375/250...800	sym: 345/345/345...800 unsym: 450/450/450...800
	MPP working voltage range (U <sub>MPPworkmin</sub> - U <sub>MPPworkmax</sub> )	V	180...800				
	Max. working voltage (U <sub>DCworkmax</sub> )	V	800				
	Max. input current (I <sub>DCmax</sub> ) per DC input		sym: 18/18 unsym: 20/10		sym: 20/20/20 unsym: 20/20/10		
	Max. input current with parallel connection (DC1+DC2 / DC3 input)	A	36/-		40/20		
	Max. PV short-circuit current (I <sub>SC_PV</sub> ) per DC input	A	-				
	Number of DC inputs		2		3		
Number of independent MPP trackers		2		3			
Output side (AC)	Rated power. cos φ = 1 (P <sub>AC,r</sub> )	kW	10	12	15	17	20
	Max. apparent output power. cos φ <sub>adj</sub>	kVA	10	12	15	17	20
	Min. output voltage (U <sub>ACmin</sub> )	V	184				
	Max. output voltage (U <sub>ACmax</sub> )	V	264.5				
	Rated output current (I <sub>AC,r</sub> )	A	14.6	17.4	21.7	24.6	29.0
	Max. output current (I <sub>ACmax</sub> )	A	16.2	19.3	24.2	27.4	32.2
	Short-circuit current (peak/RMS)	A	25/16.6	27.4/16.7	42/28.5	41.3/29	51/36.5
	Grid connection		3N~. 400V. 50 Hz				
	Rated frequency (f <sub>r</sub> )	Hz	50				
	Min./max. grid frequency (f <sub>min</sub> /f <sub>max</sub> )	Hz	47/51.5				
	Setting range of the power factor (cos φ <sub>AC,r</sub> )		0.8...1...0.8				
	Power factor for rated power (cos φ <sub>AC,r</sub> )		1				
	Max. THD	%	3				
	Standby (night-time consumption)	W	1.8				
η	Max. efficiency	%	97.7	97.7	98.0	98.0	98.0
	European efficiency	%	97.1	97.1	97.2	97.3	97.3
	MPP adjustment efficiency	%	99.9	99.9	99.9	99.9	99.9



Power class		12	15	17	20
System data	Topology: Without galvanic isolation – transformerless		✓		
	Protection class according to IEC 60529 (housing / fan)		IP 65 / IP 55		
	Protective class in accordance with IEC 62103		I		
	Overvoltage category in accordance with IEC 60664-1, input side (PV generator)		II		
	Overvoltage category in accordance with IEC 60664-1, output side (grid connection)		III		
	Degree of contamination		4		
	Environmental category (outdoor installation)		✓		
	Environmental category (indoor installation)		✓		
	UV resistance		✓		
	AC cable diameter (min-max)	mm	9...17		
	AC cable cross-section (min-max)	mm <sup>2</sup>	4...6	6...16	
	DC cable cross-section (min-max)	mm <sup>2</sup>	4...6		
	Max. fuse protection on output side		B25 / C25	B32 / C32	B40 / C40
	Internal operator protection in accordance with EN 62109-2		RCCB type B		
	Independent disconnection device according to VDE 0126-1-1		✓		
	Height/width/depth	mm (in)	445/580/248 (17.52/22.83/9.76)	540/700/265 (21.26/27.56/10.43)	
	Weight	kg (lb)	37.5 (82.67)	48.5 (106.9)	
	Cooling principle – regulated fans		✓		
	Max. air throughput	m <sup>3</sup> /h	2 x 48	2 x 84	
	Max. noise emission	dBA	44	56	
Ambient temperature	°C (°F)	-20...60 (-4...140)			
Max. installation altitude above sea level	m (ft)	2000 (6562)			
Relative humidity	%	4...100			
Connection technology, DC side		SUNCLIX plug			
Connection technology, AC side		Spring-type terminal strip			
Interfaces	Ethernet LAN (RJ45)		2		
	RS485		1		
	S0		1		
	Analogue inputs		1		
	Potential-free contact for self-consumption control		1		
	PIKO BA Sensor Interface		1		
	Webserver (user interface)		✓		
	Warranty	Years	5		
Optional warranty extension for (years)		5 / 10 / 15			
Directives/Certification <sup>2)</sup>		CE, GS, EN 62109-1, EN 62109-2, EN 60529, IEC 61683, CEI 0-21, EN 50438*, G83/2, IEC 61727, IEC 62116, RD 1699, TOR D4, UNE 206006 IN, UNE 206007-1 IN, UNE 217001 IN, UTE C15-712-1, VDE 0126-1-1, VDE-AR-N 4105			

Subject to technical changes. Errors excepted. You can find current information at [www.kostal-solar-electric.com](http://www.kostal-solar-electric.com). Manufacturer: KOSTAL Industrie Elektrik GmbH, Hagen, Germany

<sup>1)</sup> You should avoid operating the inverter continuously at above 110% of the DC rated output


<sup>2)</sup> Does not apply to all national annexes to EN 50438

# PIKO inverters - the new generation




- 10
- 12
- 15
- 17
- 20


## PIKO 10

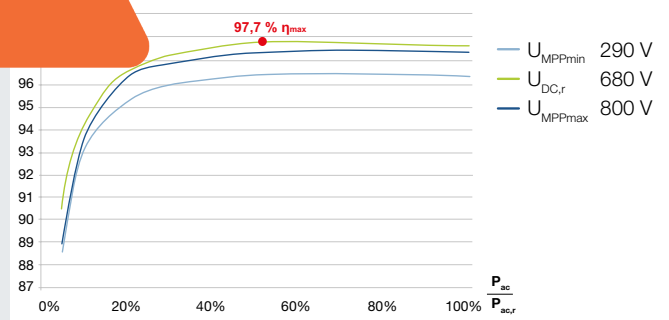


## PIKO 12

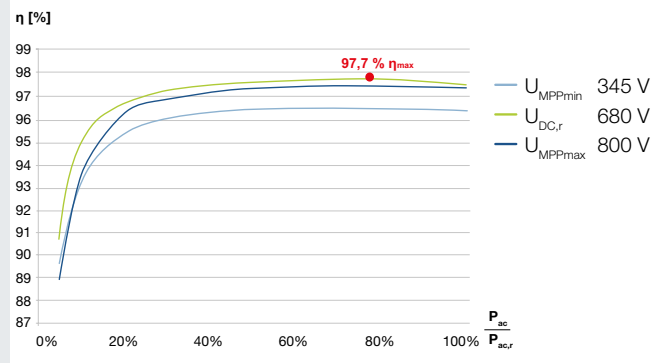


## PIKO 15

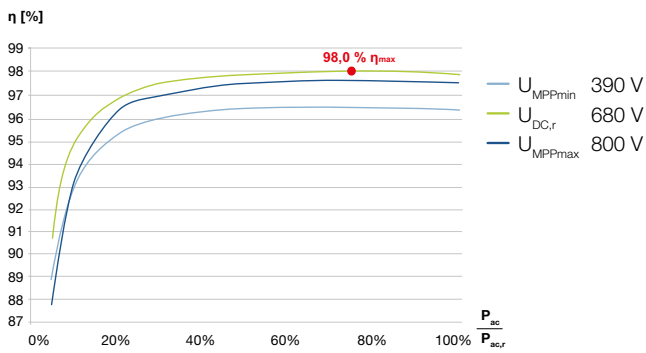

## PIKO 17

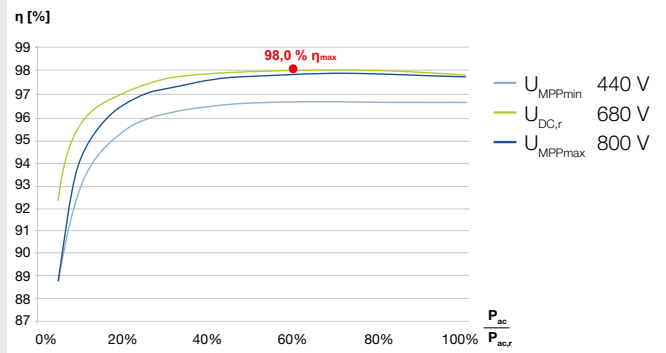

## PIKO 20

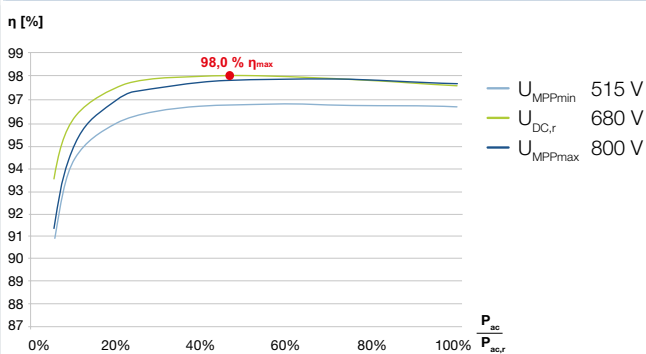

### Services for our products

FAQs:  
[kostal-solar-electric.com/service-support](http://kostal-solar-electric.com/service-support)

Product registration, warranty extension or purchase of accessories: [shop.kostal-solar-electric.com](http://shop.kostal-solar-electric.com)

Get in touch: [service-solar@kostal.com](mailto:service-solar@kostal.com)



# KOSTAL

KOSTAL Solar Electric GmbH  
Hanferstr. 6  
79108 Freiburg i. Br.  
Deutschland  
Telefon: +49 761 47744 - 100  
Fax: +49 761 47744 - 111

KOSTAL Solar Electric Ibérica S.L.  
Edificio abm  
Ronda Narciso Monturiol y Estarriol, 3 Torre  
B, despachos 2 y 3  
Parque Tecnológico de Valencia  
46980 Valencia  
España  
Teléfono: +34 961 824 - 934  
Fax: +34 961 824 - 931

KOSTAL Solar Electric France SARL  
11, rue Jacques Cartier  
78280 Guyancourt  
France  
Téléphone: +33 1 61 38 - 4117  
Fax: +33 1 61 38 - 3940

KOSTAL Solar Electric Hellas E.Π.E.  
47 Steliou Kazantzidi st., P.O. Box: 60080 1st  
building – 2nd entrance  
55535, Pilea, Thessaloniki  
Ελλάδα  
Τηλέφωνο: +30 2310 477 - 550  
Φαξ: +30 2310 477 - 551

KOSTAL Solar Electric Italia Srl  
Via Genova, 57  
10098 Rivoli (TO)  
Italia  
Telefono: +39 011 97 82 - 420  
Fax: +39 011 97 82 - 432

KOSTAL Solar Elektrik Turkey  
Mahmutbey Mah. Taşocağı Yolu Cad.  
No:3 (B Blok), Ağaoğlu My Office 212  
Kat:16, Ofis No:269  
Bağcılar - İstanbul / Türkiye  
Telefon: +90 212 803 06 24  
Faks: +90 212 803 06 25

[www.kostal-solar-electric.com](http://www.kostal-solar-electric.com)